


Double hung windows consist of two separate window panels, both of which slide up and down. Typically, the window is opened by sliding the bottom panel upwards.


Tools Required For Measuring: Measuring Tape

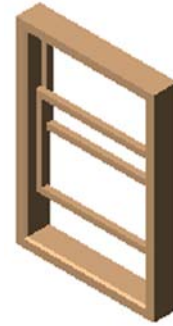

Follow the Step by Step Instructions Below to Measure Your Double Hung Windows.

For technical assistance, contact Automatic Specialties, Inc. at (800)445-2370

1) Measure the width inside of the window frame.

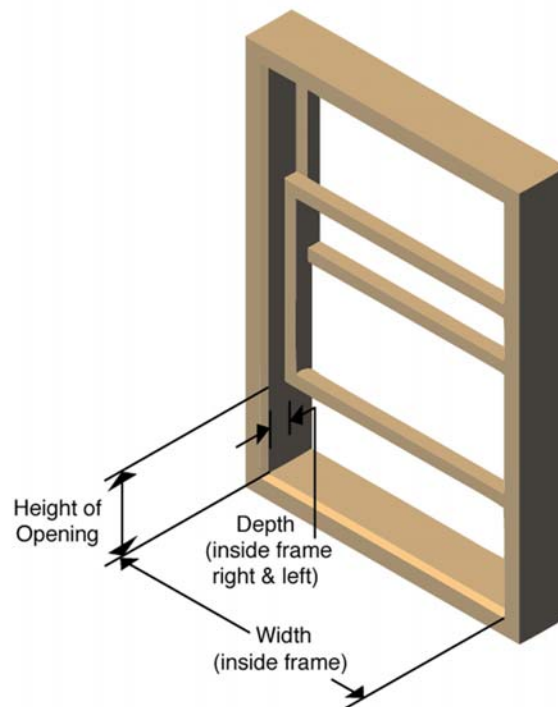

2) Measure the depth of the window frame where the posts will be mounted (inside right and left sides of window frame).

- If the depth of the window frame measures less than $\frac{3}{4}$ inches, the guard will need to be mounted on the outside of the window frame (on the window trim or wall). Add at least 1-1/2 inches to the window frame width measurement. (The extra 1-1/2 inches is the width of both side posts)

3) Measure the height of the window opening with the window fully opened.

- Open the bottom window panel upwards as far as it will open. If the height of the opening measures more than 21-3/8 inches, use a window stop to prevent the window from opening more than 4 inches above the top bar of the guard. If the top window panel opens and it cannot be secured, the entire window must be guarded. (Follow measuring instructions for sliding and casement windows)

4) Once you have determined the above measurements, you can request sizing and pricing information.

- Contact Automatic Specialties, Inc. at (800)445-2370 or fill out online form at the address below <http://www.auspin.com/gaprices.htm>

5) Once you receive your window guard, install it following the included instructions.

- Installation instructions can also be obtained by visiting <http://www.auspin.com/gainstall.htm>

Cautionary Note

- There should be no more than a 4-inch opening anywhere in the guarded area. This includes the area between the top bar on the window guard and the bottom of the opened window panel. (Figure 1-2)

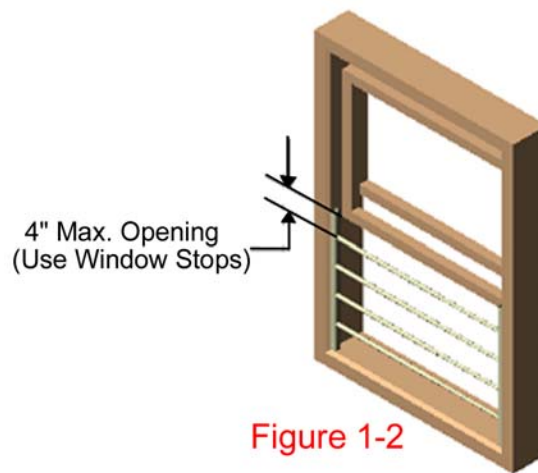


Figure 1-2

Safety Notes

- Before installing, verify building and fire codes are not being violated. Contact local building code or fire department for specific codes.
- Screws should be anchored firmly into a solid stud or frame material to achieve maximum safety.
- This window guard is intended to protect against potential window falls by children age 5 & under.
- Parents, child-care custodians, and older children must understand the proper operation of this window guard in case of emergency.
- Window guards are designed to be a deterrent to accidental window falls. This product is not intended as a substitute for proper adult supervision.
- Guardian Angel Window Guards are not meant to protect against intruders.

**⚠️ WARNING
Possible Fall Hazard**

Young children may fall out of the window if the window guard is not installed correctly.

- Check to make sure there are no openings in the guarded area more than 4 inches.

Young children may fall out of the window if installation instructions are not followed:

- Use recommended materials and techniques.
- Make sure window guard is securely attached to the window frame.
- Make sure the window frame is in good condition.